

# TTL


Lightweight clamp for horizontal lifting of tubes, pipes, and solid round materials

**Application:**

- For horizontal lifting and transporting of tubes, pipes, tube bundles, rolls, and other solid round materials
- The clamp is locked in the open position. To perform lifting, the operator must activate the handle and hold it up while the force on the lifting eye is going upwards. When laying down the load, the clamp automatically locks itself open
- TTL jaw opening available from: 1.90 to 20 in.
- Working load limit (WLL) 1,100 - 6,600 lbs
- Higher WLL or jaw openings available upon request

**Features and Benefits:**

- Lightweight design and easy to use
- Tough quality heavy-duty body
- Can be delivered with protection to avoid damaging of the load
- Maintenance-friendly. Easy to exchange parts are available upon request

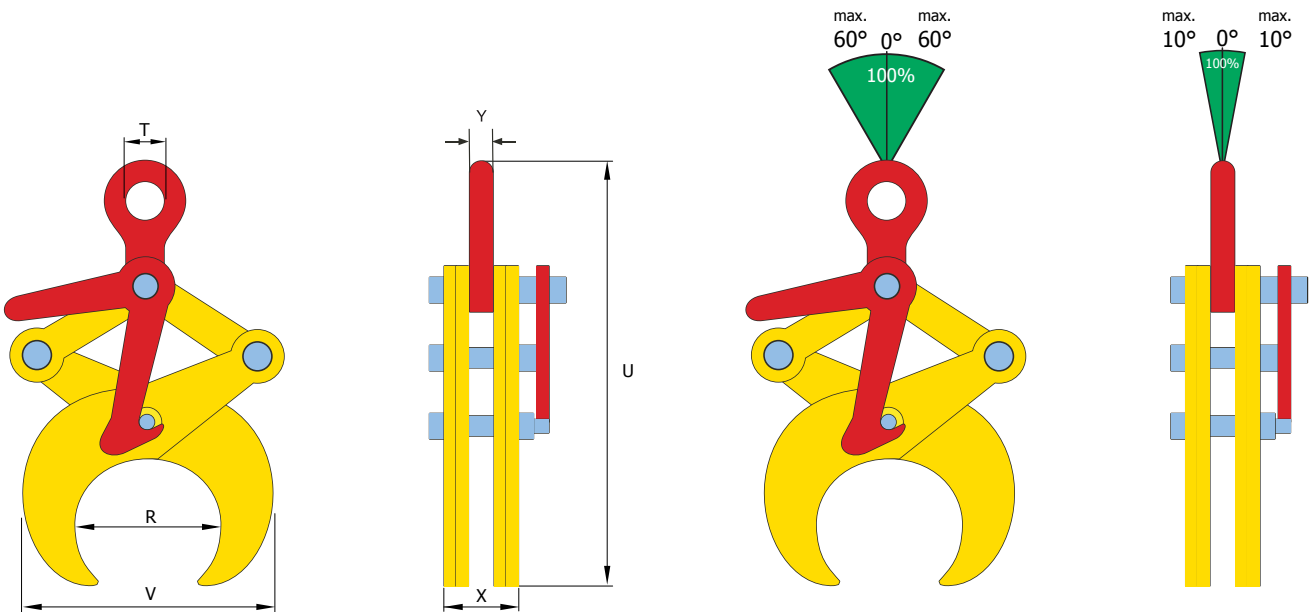

| Reference No. | Type    | Capacity/WLL (lb/pc) | Jaw opening (R) (inches) | Dimensions in inches |               |      |      |      | Weight (lb/pc) |
|---------------|---------|----------------------|--------------------------|----------------------|---------------|------|------|------|----------------|
|               |         |                      |                          | V min - max          | U min - max   | T    | X    | Y    |                |
| 800550        | 0.5 TTL | 1,100                | 1.90 - 4.50              | 5.75 - 8.15          | 11.81 - 15.74 | 1.77 | 1.85 | 0.59 | 10             |
| 801011        | 1 TTL   | 2,200                | 4.50 - 8.62              | 8.86 - 12.60         | 16.92 - 24.21 | 1.77 | 1.85 | 0.59 | 20             |
| 802021        | 2 TTL   | 4,400                | 8.62 - 14.48             | 19.29 - 24.01        | 26.37 - 37.59 | 2.51 | 2.20 | 0.62 | 69             |
| 803036        | 3 TTL   | 6,600                | 14.48 - 20.00            | 23.22 - 27.95        | 34.44 - 45.86 | 2.51 | 2.20 | 0.62 | 86             |